



## FEATURES:

- 20" Supply & Return Duct Collars with Protective Covers
- 12" Reactivation Inlet & Outlet Duct Collars with Protective Covers
- Weatherproof Construction – Stainless Steel single wall construction
- Fork tube pocket base
- Desiccant wheel with drive system
- Full perimeter chain drive with lifetime rating
- Silicone wiper seals with a 10-year rating
- Backward incline non-overloading fans – Process Air
- Power connection including Cam style locks for easy field connection
- Tooled access doors
- Operation and Fault Indicator Lights
- Hour Meter
- High/Low Electric React Capacity switch
- Phase monitor protection
- Remote Humidistat Ready Plug
- Replaceable filter 2" 30% MERV 8

## OPTIONS:

- (4) Swivel Locking Casters
- Structurally Certified Protective/Stacking Cage (bolted)
- Remote Humidistat (with 50' of cord)
- Supply & Return Ducting
- Reactivation Inlet & Outlet Ducting
- Ducting Accessories
- Gas Reactivation
- 100' of #2 Power Cable Kit
- Lay Flat (Clear)

## ETL CERTIFICATION



- UL1995/CSA C22.2 No. 236





## ACTIVE DESICCANT TECHNOLOGY

Provides 40°F + dew point reduction as both adsorption and desorption are simultaneously driven by water vapor equilibrium of air and desiccant.

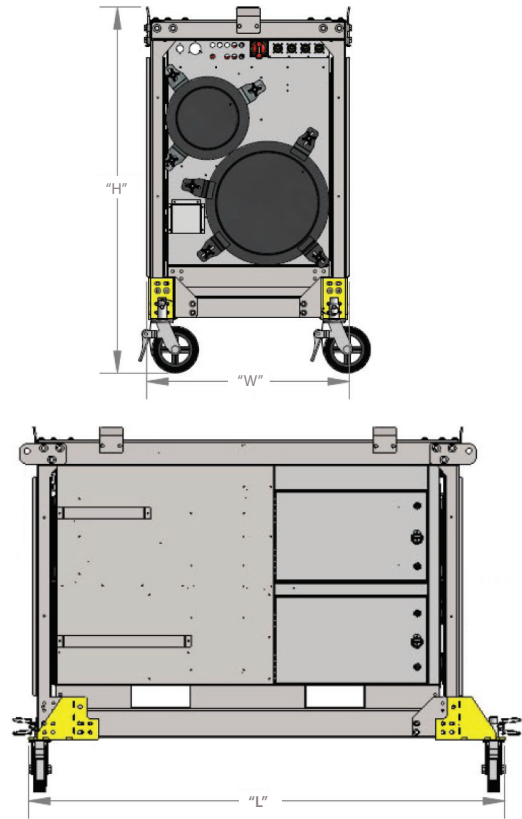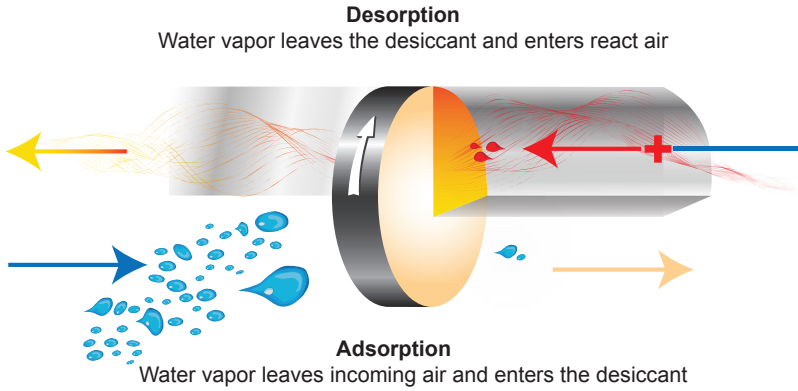

### Technical Specifications\*

	Product	MS-2400/2000	
<b>Unit Physical Data*</b>			
Length (L)	[in]	89	
Width (W)	[in]	35	
Height (H)	[in]	63**	
Approximate Unit Weight	[lb]	1,250	
<b>Utility Data</b>		<b>Electric</b>	<b>Gas</b>
FLA React Heater Load	[amps]	44	0
FLA	[amps]	50.5	21.2
MCA	[amps]	63.1	26.5
MOP	[amps]	70	40
<b>Voltage Options</b>		<b>Electric</b>	<b>Gas</b>
Electric Reactivation	[V/PH]	460/3	230/1
<b>Supply Air Data</b>			
Process Air Volume	[scfm]	2,400	2,000
External Static Pressure	[in W.C.]	0	2.0
<b>Reactivation Air Data</b>			
Reactivation Air Volume	[scfm]	553	
External Static Pressure	[in W.C.]	0.5	
<b>Generator Size</b>		<b>Electric</b>	<b>Gas</b>
Minimum	[kw]	50	8
<b>Gas Sizing</b>			
Pipe Size, NPT	[in]	1/2	
Gas Inlet Pressure	[in W.C.]	7-14	
Gas Max Usage NG	[MBTUH]	120	
Gallons/HR Max Usage LP	[Gal/hr]	1.3	
<b>Propane Tank Size</b>			
Minimum	[gallons]	120	

### Moisture Removal Capacity

Entering Air Dry Bulb (°F)	Nominal Moisture Removal (lb/hr)					
	Entering Air Relative Humidity (%)					
	80	70	60	50	40	30
80	54	53	51	47	39	31
75	54	53	50	46	38	30
70	55	53	49	44	37	28
65	54	51	48	41	34	25
60	52	49	44	38	30	23
55	49	45	39	33	26	19
50	45	40	34	28	23	17
45	39	34	29	24	19	14
40	33	28	24	20	16	11

Entering Air Dry Bulb (°F)	Nominal Moisture Removal (Gallon/Day)					
	Entering Air Relative Humidity (%)					
	80	70	60	50	40	30
80	154	152	146	134	112	89
75	154	152	143	132	109	86
70	157	152	140	126	106	80
65	154	146	137	117	97	72
60	149	140	126	109	86	66
55	140	129	112	94	74	54
50	129	114	97	80	66	49
45	112	97	83	69	54	40
40	94	80	69	57	46	31

\*Actual weight and dimensions to be provided at time of quotation and submittal.

\*\* With cage and caster options included.

Continual engineering and research for product improvement may result in design and specification changes. Consult sales for certified technical data.

